


# RST 9.1




*Note: Gingerly spray mist of water on top of the Application Sponge to lightly moisten it. The moisture will turn into steam when pressed and will help to mold the RST 9.1 into uneven areas of the product. It will also stop the paper from curling.*

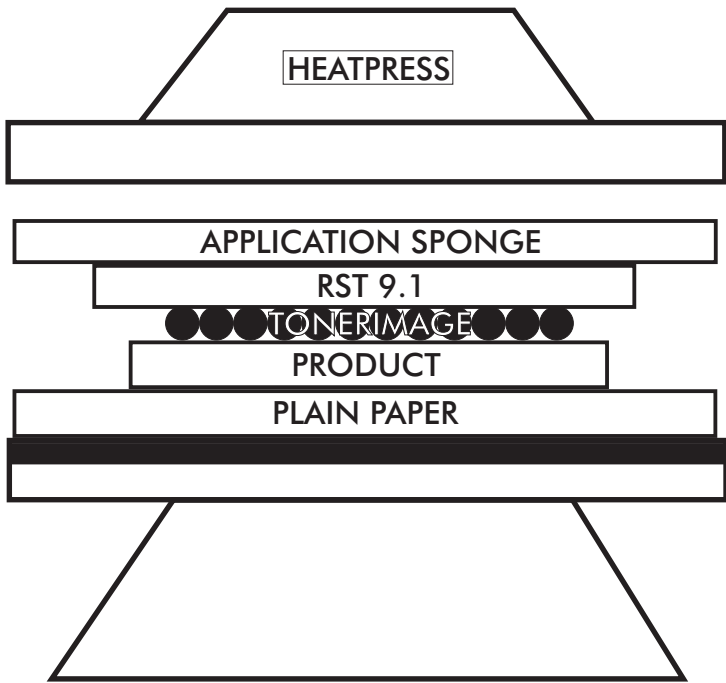

Take product off the HeatPress when finished pressing. Spray the RST paper with water and wait until it completely comes loose from the toner image. Remove RST paper and wipe the image area with a damp/wet towel or cloth. Tip: Very rough surface cover image with T.Seal and press again for 5 seconds.

## PRINT



RST 9.1



MIRROR

## PRESS



140°C  
285°F  
150°C  
300°F



45-60 SEC



60-80 PSI  
MED/HIGH

## SOAK



COLD